

YDEEVNEDEKLARATION nr. IG10023

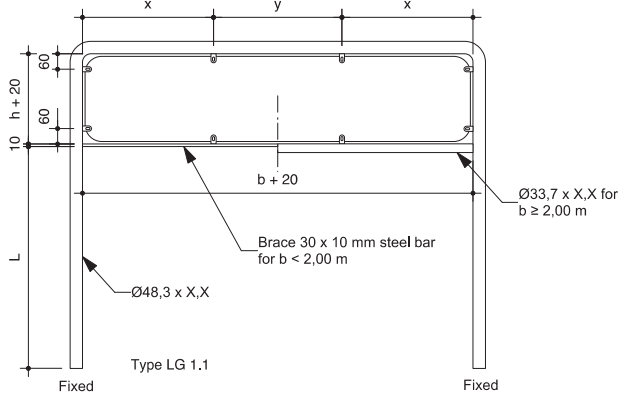
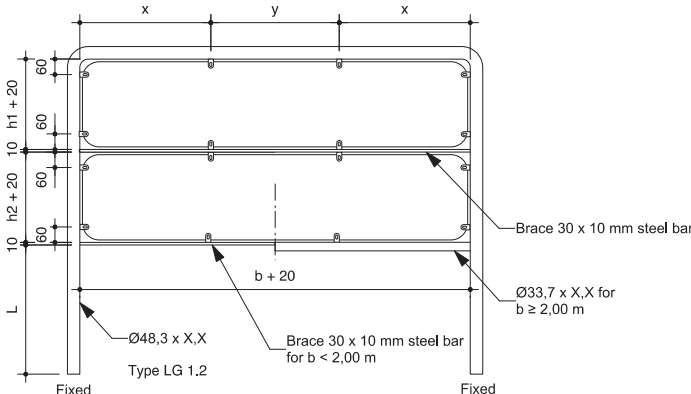
- | | |
|--|---|
| 1. Byggevaretype: | Faste lodrette trafikskilte |
| 2. Byggevareidentifikation: | Lave galger til montage |
| 3. Byggevarens tilsigtede anvendelse: | Stationære, vertikale vejtrafikskilte |
| 4. Fabrikantens navn og adresse: | INFRA GROUP DANMARK ApS
Højgårdsvej 11
5750 Ringe |
| 5. Navn og kontaktadresse på den bemyndigede repræsentant: | Ikke relevant |
| 6. Systemet eller systemerne til vurdering og kontrol af konstansen af byggevarens ydeevne (AVCP): | System 1 |
| 7. Harmoniseret standard:
Notificeret organ: | EN 12899-1:2007
DBI Certification A/S, Notified Body no. 2531 har udført og udfører indledende inspektion af fabriksanlæg og egen produktionskontrol, samt kontinuerlig overvågning, vurdering og evaluering af fabrikkens egenkontrol (FPC) efter system 1. |
| 8. Certifikat of Conformity: | 2531-CPR-CSC10023 |

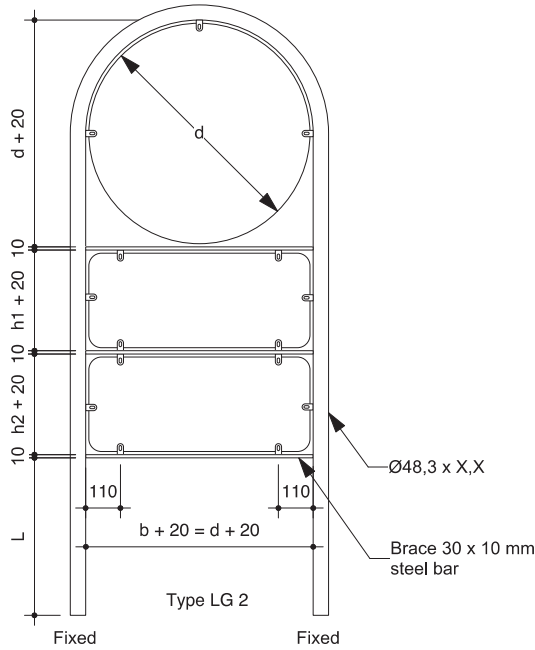
9. Deklareret ydeevne:

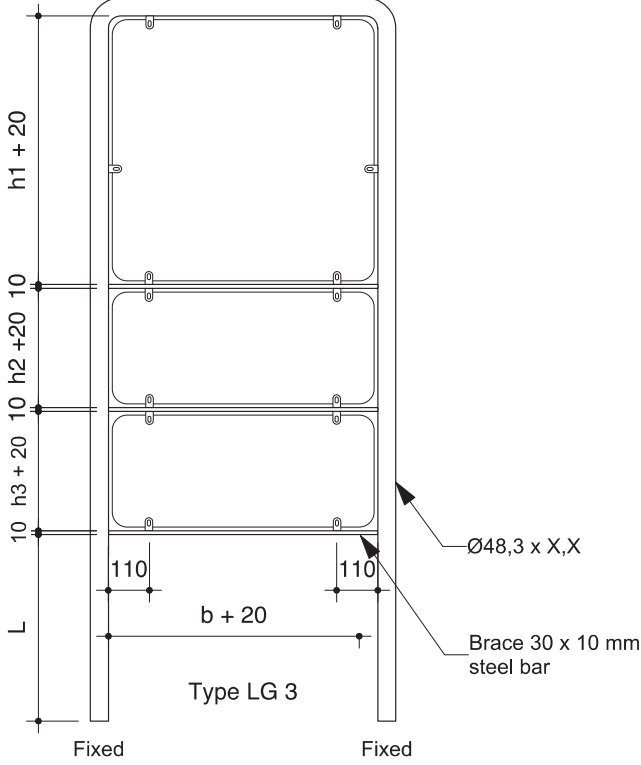
Annex 1

EXTENT

Description and classification:

Sign, sizes and mounting system Pipes: Minimum steel quality: S235 in dimension $\varnothing 33,7 \times 3,2$, $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness		Classification according to wind load classes																																																																																																																																		
		Placed in WL1	Placed in WL2	Placed in WL3																																																																																																																																
 <p>Type LG 1.1</p>		$h \leq 500$ mm, $b \leq 2500$ mm and $L \leq 500$ mm																																																																																																																																		
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.																																																																																																																																
 <p>Type LG 1.2</p>		$h1 \leq 330$ mm, $b \leq 1750$ mm and $L \leq 500 + h2 + 30$ mm																																																																																																																																		
		PAF1, WL1, DSL0, PLO, TDB2, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.																																																																																																																																
<table border="1" data-bbox="359 1467 869 1870"> <thead> <tr> <th rowspan="2">b</th> <th rowspan="2">Numbers of braces</th> <th colspan="8">Measures for braces</th> </tr> <tr> <th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th> </tr> </thead> <tbody> <tr> <td>1000</td> <td>2</td> <td>344</td><td>332</td><td>344</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1250</td> <td>2</td> <td>426</td><td>418</td><td>426</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1500</td> <td>2</td> <td>510</td><td>500</td><td>510</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1750</td> <td>2</td> <td>593</td><td>584</td><td>593</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>2000</td> <td>2</td> <td>677</td><td>666</td><td>677</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>2250</td> <td>4</td> <td>460</td><td>450</td><td>450</td><td>450</td><td>460</td><td></td><td></td><td></td> </tr> <tr> <td>2500</td> <td>4</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td><td></td><td></td> </tr> <tr> <td>2750</td> <td>4</td> <td>560</td><td>550</td><td>550</td><td>550</td><td>560</td><td></td><td></td><td></td> </tr> <tr> <td>3000</td> <td>5</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td><td></td> </tr> <tr> <td>3250</td> <td>6</td> <td>475</td><td>464</td><td>464</td><td>464</td><td>464</td><td>464</td><td>475</td><td></td> </tr> <tr> <td>3500</td> <td>6</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td> </tr> </tbody> </table>		b	Numbers of braces	Measures for braces								1	2	3	4	5	6	7	8	1000	2	344	332	344						1250	2	426	418	426						1500	2	510	500	510						1750	2	593	584	593						2000	2	677	666	677						2250	4	460	450	450	450	460				2500	4	510	500	500	500	510				2750	4	560	550	550	550	560				3000	5	510	500	500	500	500	510			3250	6	475	464	464	464	464	464	475		3500	6	510	500	500	500	500	500	510		$h1 \leq 330$ mm, $h2 \leq 330$ mm, $b \leq 3000$ mm and $L \leq 500$ mm		
				b	Numbers of braces	Measures for braces																																																																																																																														
1	2	3	4			5	6	7	8																																																																																																																											
1000	2	344	332	344																																																																																																																																
1250	2	426	418	426																																																																																																																																
1500	2	510	500	510																																																																																																																																
1750	2	593	584	593																																																																																																																																
2000	2	677	666	677																																																																																																																																
2250	4	460	450	450	450	460																																																																																																																														
2500	4	510	500	500	500	510																																																																																																																														
2750	4	560	550	550	550	560																																																																																																																														
3000	5	510	500	500	500	500	510																																																																																																																													
3250	6	475	464	464	464	464	464	475																																																																																																																												
3500	6	510	500	500	500	500	500	510																																																																																																																												
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.																																																																																																																																		
<table border="1" data-bbox="359 1467 869 1870"> <thead> <tr> <th rowspan="2">b</th> <th rowspan="2">Numbers of braces</th> <th colspan="8">Measures for braces</th> </tr> <tr> <th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th> </tr> </thead> <tbody> <tr> <td>1000</td> <td>2</td> <td>344</td><td>332</td><td>344</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1250</td> <td>2</td> <td>426</td><td>418</td><td>426</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1500</td> <td>2</td> <td>510</td><td>500</td><td>510</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>1750</td> <td>2</td> <td>593</td><td>584</td><td>593</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>2000</td> <td>2</td> <td>677</td><td>666</td><td>677</td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>2250</td> <td>4</td> <td>460</td><td>450</td><td>450</td><td>450</td><td>460</td><td></td><td></td><td></td> </tr> <tr> <td>2500</td> <td>4</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td><td></td><td></td> </tr> <tr> <td>2750</td> <td>4</td> <td>560</td><td>550</td><td>550</td><td>550</td><td>560</td><td></td><td></td><td></td> </tr> <tr> <td>3000</td> <td>5</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td><td></td> </tr> <tr> <td>3250</td> <td>6</td> <td>475</td><td>464</td><td>464</td><td>464</td><td>464</td><td>464</td><td>475</td><td></td> </tr> <tr> <td>3500</td> <td>6</td> <td>510</td><td>500</td><td>500</td><td>500</td><td>500</td><td>500</td><td>510</td><td></td> </tr> </tbody> </table>		b	Numbers of braces	Measures for braces								1	2	3	4	5	6	7	8	1000	2	344	332	344						1250	2	426	418	426						1500	2	510	500	510						1750	2	593	584	593						2000	2	677	666	677						2250	4	460	450	450	450	460				2500	4	510	500	500	500	510				2750	4	560	550	550	550	560				3000	5	510	500	500	500	500	510			3250	6	475	464	464	464	464	464	475		3500	6	510	500	500	500	500	500	510		$h1 \leq 330$ mm, $h2 \leq 330$ mm, $b \leq 3500$ mm and $L \leq 500$ mm		
				b	Numbers of braces	Measures for braces																																																																																																																														
1	2	3	4			5	6	7	8																																																																																																																											
1000	2	344	332	344																																																																																																																																
1250	2	426	418	426																																																																																																																																
1500	2	510	500	510																																																																																																																																
1750	2	593	584	593																																																																																																																																
2000	2	677	666	677																																																																																																																																
2250	4	460	450	450	450	460																																																																																																																														
2500	4	510	500	500	500	510																																																																																																																														
2750	4	560	550	550	550	560																																																																																																																														
3000	5	510	500	500	500	500	510																																																																																																																													
3250	6	475	464	464	464	464	464	475																																																																																																																												
3500	6	510	500	500	500	500	500	510																																																																																																																												
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB4, P2, E1 and SP1.	X																																																																																																																																		

Sign, sizes and mounting system Pipes: Minimum steel quality: S235 in dimension Ø33,7 x 3,2, Ø48,3 x 2,9, Ø48,3 x 3,0 and Ø48,3 x 3,2 mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness	Classification according to wind load classes		
	Placed in WL1	Placed in WL2	Placed in WL3
 <p> $d + 20$ 10 $h1 + 20$ 10 $h2 + 20$ 10 L 110 110 $b + 20 = d + 20$ Type LG 2 Fixed Fixed $\text{Ø}48,3 \times X,X$ Brace 30 x 10 mm steel bar </p>	$d \leq 700$ mm and $L \leq h1 + h2 + 60 + 500$ m		
	PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.
	$d \leq 700$ mm, $h1 \leq 300$ mm and $L \leq h2 + 30 + 500$ m		
	PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.
	$d \leq 700$ mm, $h1 \leq 300$ mm, $h2 \leq 300$ mm and $L \leq 500$ m		
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.	

Sign, sizes and mounting system Pipes: Minimum steel quality: S235 in dimension $\varnothing 33,7 \times 3,2$, $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness		Classification according to wind load classes		
		Placed in WL1	Placed in WL2	Placed in WL3
		$h1 \leq 700$ mm, $b \leq 700$ mm and $L \leq h2 + h3 + 60 + 500$ m		
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.
		$h1 \leq 700$ mm, $h2 \leq 300$ mm, $b \leq 700$ mm and $L \leq h3 + 30 + 500$ m		
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.
		$h1 \leq 700$ mm, $h2 \leq 300$ mm, $h3 \leq 300$ mm, $b \leq 700$ mm and $L \leq 500$ mm		
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.		

Resistance to horizontal loads		NPD
Resistance to bending		NPD
Resistance to torsion		NPD
Fixings:		Pass. M6 Screws, nuts and washers M6: $f_y \geq 320$ MPa Pressure force for tightening: 2 kN
Temporary deflection (supports) -bending -torsion		NPD
Permanent deflection		NPD
Performance under vehicle impact		NPD

ORALITE® 5710 Engineering Grade:
Retroreflective sheeting ORALITE® 5710 Engineering Grade with the following original dyed colours:

Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3. For black colours: 7.2.2.1.3	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5. For black colours: 7.2.2.1.4
White	ORALITE® 5710-010 Engineering Grade	CR2	RA1	pass	pass
Yellow	ORALITE® 5710-020 Engineering Grade	CR2	RA1	pass	pass
Red	ORALITE® 5710-030 Engineering Grade	CR2	RA1	pass	pass
Blue	ORALITE® 5710-050 Engineering Grade	CR2	RA1	pass	pass
Green	ORALITE® 5710-060 Engineering Grade	CR2	RA1	pass	pass
Orange	ORALITE® 5710-035 Engineering Grade	CR1	RA1	pass	pass
Brown	ORALITE® 5710-080 Engineering Grade	CR2	RA1	pass	pass

Retroreflective sheeting ORALITE® 5710 engineering Grade with the following Lettering Film:

Black	ORALITE® 5071-070 Lettering Film	NR1	-	pass	pass
-------	----------------------------------	-----	---	------	------

Retroreflective sheeting ORALITE® 5710 engineering Grade with the following screen printing colours:

Yellow	ORALITE® 5018-020 Screen Printing ink	CR2	RA1	pass	pass
red	ORALITE® 5018-030 Screen Printing ink	CR2	RA1	pass	pass
blue	ORALITE® 5018-050 Screen Printing ink	CR2	RA1	pass	pass
Green	ORALITE® 5018-060 Screen Printing ink	CR2	RA1	pass	pass
black	ORALITE® 5018-070 Screen Printing ink	NR1	-	pass	pass

Digital printing colours:					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate ORALITE [®] 5062-000 Transparent Film.					
Digital Printing Colour ORALITE[®] 5019 UV Digital Printing Ink					
On white sheeting	ORALITE [®] 5710-010 Engineering Grade and				
White	ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE [®] 5019-020 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE [®] 5019-030 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE [®] 5019-050 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE [®] 5019-060 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Grey	ORALITE [®] 5019-625 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Black	ORALITE [®] 5019-070 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	NR1	-	pass	pass
If the colour black is printed solely, this material combination is admitted to be used without the transparent laminate.					
Black	ORALITE [®] 5019-070 UV Digital Printing Ink	NR1	-	pass	pass
Digital printing colour ORALITE[®] 5019i UV Digital Printing Ink					
On white sheeting	ORALITE [®] 5710-010 Engineering Grade and				
White	ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE [®] 5019i-020 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE [®] 5019i-030 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE [®] 5019i-050 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE [®] 5019i-060 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Orange	ORALITE [®] 5019i-035 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR1	RA1	pass	pass
Brown	ORALITE [®] 5019i-080 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	CR2	RA1	pass	pass
Black	ORALITE [®] 5019i-070 UV Digital Printing Ink and ORALITE [®] 5062-000 Transparent Film	NR1	-	pass	pass

Clear protective overlay film:

Clear protective overlay films (Anti-Graffiti) are always admitted in combination with retroreflective sheeting and a colouring process.

Anti-Graffiti:

The original dyed retroreflective sheeting with the screen-printing ORALITE[®] 5018 is accepted to be laminated with the clear protective overlay film ORALITE[®] 5095 Anti-Graffiti Film for the following colours:

Original dyed retroreflective sheeting ORALITE[®] 5710 Engineering Grade with screen-printing ORALITE[®] 5018

Red	ORALITE [®] 5018-030 Screen Printing Ink and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Blue	ORALITE [®] 5018-050 Screen Printing Ink and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Black	ORALITE [®] 5018-070 Screen Printing Ink and ORALITE [®] 5095 Anti-Graffiti Film	NR1	-	pass	pass

ORALITE[®] 5810 High Intensity Grade:

Retroreflective sheeting ORALITE[®] 5810 High Intensity Grade with the following original dyed colours:

Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3. For black colours: 7.2.2.1.3	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5. For black colours: 7.2.2.1.4
White	ORALITE [®] 5810-010 High Intensity Grade	CR2	RA2	pass	pass
Yellow	ORALITE [®] 5810-020 High Intensity Grade	CR2	RA2	pass	pass
Red	ORALITE [®] 5810-030 High Intensity Grade	CR2	RA2	pass	pass
Blue	ORALITE [®] 5810-050 High Intensity Grade	CR2	RA2	pass	pass
Green	ORALITE [®] 5810-060 High Intensity Grade	CR2	RA2	pass	pass
Brown	ORALITE [®] 5810-080 High Intensity Grade	CR2	RA2	pass	pass

Retroreflective sheeting ORALITE[®] 5810 High Intensity Grade with the following Lettering Film:

Black	ORALITE [®] 5081-070 Lettering Film	NR1	-	pass	pass
-------	--	-----	---	------	------

Retroreflective sheeting ORALITE[®] 5810 High Intensity Grade with the following Coloured Laminates:

Yellow	ORALITE [®] 5061-020 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE [®] 5061-030 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE [®] 5061-050 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE [®] 5061-060 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE [®] 5061-080 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE [®] 5061-625 Transparent Film	CR1	RA2	pass	pass

Retroreflective sheeting ORALITE[®] 5810 High Intensity Grade with the following Screen Printing Colours:					
Yellow	ORALITE [®] 5018-020 Screen Printing Ink	CR2	RA2	pass	pass
Red	ORALITE [®] 5018-030 Screen Printing Ink	CR2	RA2	pass	pass
Blue	ORALITE [®] 5018-050 Screen Printing Ink	CR2	RA2	pass	pass
Green	ORALITE [®] 5018-060 Screen Printing Ink	CR2	RA2	pass	pass
Black	ORALITE [®] 5018-070 Screen Printing Ink	NR1	-	pass	pass
Digital Printing Colours:					
Digital Printing Colour ORALITE[®] 5019 UV Digital Printing Ink					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with a transparent laminate.					
Digital Printing with protective laminate ORALITE[®] 5061-000 Transparent Film					
On white sheeting	ORALITE [®] 5810-010 High Intensity Grade and				
White	ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE [®] 5019-020 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE [®] 5019-030 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE [®] 5019-050 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE [®] 5019-060 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE [®] 5019-080 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE [®] 5019-625 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE [®] 5019-073 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	CR2	RA2*	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE [®] 5019-070 UV Digital Printing Ink and ORALITE [®] 5061-000 Transparent Film	NR1	-	pass	pass

Digital Printing with protective laminate ORALITE® 5090 Anti-Dew Film:					
On white sheeting	ORALITE®5810-010 High Intensity Grade and				
White	ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	NR1	-	pass	pass
Digital Printing with protective laminate ORALITE® 5095 Anti-Graffiti Film:					
On white sheeting	ORALITE®5810-010 High Intensity Grade and				
White	ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass
Braun	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
*Coefficient of retrorefelction: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
If the colour Black is printed solely, this material combination is admitted to be used without the transparent laminate					
Black	ORALITE® 5019-070 UV Digital Printing Ink	NR1	-	pass	pass

Digital Printing Colour ORALITE® 5019i UV Digital Printing Ink:					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate ORALITE® 5061-000 Transparent Film					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019i-020 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5019i-030 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019i-050 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5019i-060 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5019i-080 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019i-625 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019i-073 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Black	ORALITE® 5019i-070 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	NR1	-	pass	pass
Clear overlay film with special function:					
Clear overlay films with special function (anti-dew and anti-graffiti) are always admitted in combination with a dyed sheeting and a colouring process.					
Anti Dew:					
The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film anti-dew function ORALITE® 5090 Anti-Dew film for the following colours:					
Dyed Retroreflective Sheeting:					
White	ORALITE® 5810-010 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Coloured Laminate:					
Yellow	ORALITE® 5061-020 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass

Dyed Retroreflective Sheeting ORALITE[®] 5810 High Intensity Grade with Lettering film:					
Black	ORALITE [®] 5081-070 Lettering Film and ORALITE [®] 5090 Anti-Dew film	NR1	-	pass	pass
Anti-Graffiti: The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film with anti-graffiti function ORALITE [®] 5095 Anti Graffiti Film for the following colours.					
Dyed Retroreflective Sheeting:					
White	ORALITE [®] 5810-010 High Intensity Grade and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Yellow	ORALITE [®] 5810-020 High Intensity Grade and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE [®] 5810-030 High Intensity Grade and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE [®] 5810-050 High Intensity Grade and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE[®] 5810 High Intensity Grade with Coloured Laminate:					
Yellow	ORALITE [®] 5061-020 Transparent Film and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE [®] 5061-030 Transparent Film and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE [®] 5061-050 Transparent Film and ORALITE [®] 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE[®] 5810 High Intensity Grade with Lettering Film:					
Black	ORALITE [®] 5081-070 Lettering Film and ORALITE [®] 5095 Anti-Graffiti Film	NR1	-	pass	pass

External illumination:		
mean illuminance,		NPD
uniformity of illuminance		NPD
Corrosion resistance		
Steel pipes and fins		Minimum S235 SP1 The pipe and fins are after manufacturing hot dip galvanized to a minimum of 60µm
Screws, nuts and washers		M6: fy ≥ 320 MPa Stainless steel SP2 or anodized aluminum SP1
Aluminium plate		Minimum Rp0,2 ≥ 180 MPa SP1 Lacquered Al-plate on exposed side if any
Resistance to penetration of dust and water		NPD The product cannot be provided with compartments for electrical equipment

10. Ydeevnen for den byggevare, der er anført i punkt 1 og 2, er i overensstemmelse med den deklarerede ydeevne i punkt 9.

Denne ydeevnedeklaration udstedes på eneansvar af den fabrikant, der er anført i punkt 4.

Underskrevet for fabrikanten og på dennes vegne af:

Odense d. 1. maj 2024



Christian Daluiso, Adm. Direktør