

CERTIFICATE OF CONSTANCY OF PERFORMANCE

Issued by DBI Certification, notified body No. 2531.

In compliance with *Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011* (the Construction Products Regulation or CPR), this certificate applies to the construction product

Gallows with mounted signboards type BS and GS

Scope: Fixed vertical road traffic signs (ZA.6)

The product fulfils the essential characteristic:

See Annex 1

Intended use: Complete assemblies of fixed vertical road traffic signs, to be mounted at the top of a straight steel pipe

Placed on the market under the name or trade mark of:

Infra Group Danmark ApS
Industrivej 27
5750 Ringe
Danmark

and produced in the manufacturing plant:

CPA30005

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

EN 12899-1:2007 : Fixed, vertical road traffic signs-Part 1: Fixed signs

under system 1 for the performance set out in this certificate are applied and that the performance of the construction product is assessed to remain constant.

The attached annexes form part of this certificate.

Date of issue: **2018-11-21**

This certificate will remain valid as long as neither the harmonized standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly unless suspended or withdrawn by the notified product certification body.

(This certificate supersedes the previous version of this certificate issued 2018-04-18)

This certificate was first issued 2017-11-21.



Per Lyster
Responsible for evaluation



Merete Poulsen
Responsible for certification decision

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk



Prod. Reg. Nr. 7023

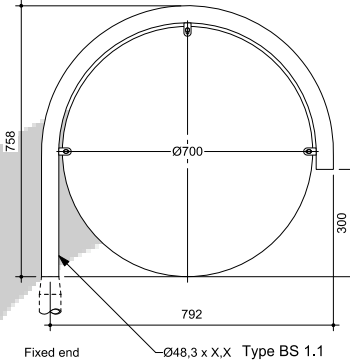
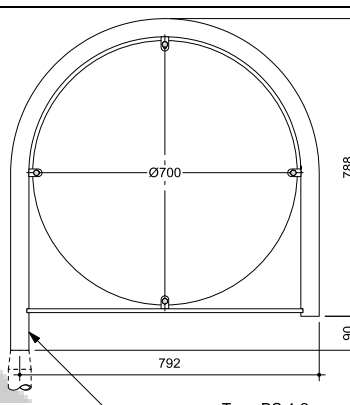
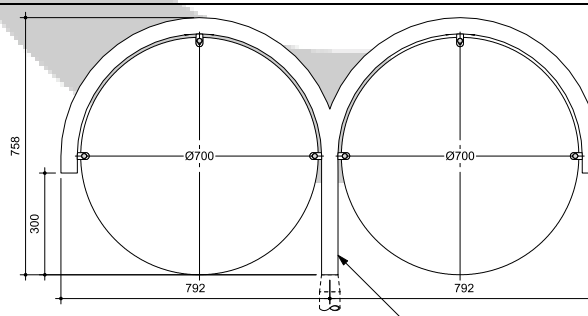
Version 2016-01-07
Page 1 of 16

Annex 1

EXTENT

Description and classification:

Sign sizes are maximum sizes (Ø, h and w)

Sizes of signboards and different types of gallows Pipes: Minimum steel quality: S235 in dimension $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness	Classification according to wind load classes		
	Placed in WL1	Placed in WL2	Placed in WL3
	Signboard: PAF1, WL1, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1. Gallows: PAF1, WL1, DSL0, PL0, TDB1, TDT4 and SP1.	Signboard: PAF1, WL2, DSL0, PL0, TDB5, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB1, TDT4 and SP1.	Signboard: PAF1, WL3, DSL0, PL0, TDB5, TDT0, P2, E1 and SP1. Gallows: PAF1, WL3, DSL0, PL0, TDB1, TDT5 and SP1.
		Signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB1, TDT4 and SP1.	Signboard: PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1. Gallows: PAF1, WL3, DSL0, PL0, TDB2, TDT4 and SP1.
	Signboard: PAF1, WL1, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1. Gallows: PAF1, WL1, DSL0, PL0, TDB1, TDT4 and SP1.	Signboard: PAF1, WL2, DSL0, PL0, TDB5, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB1, TDT4, and SP1.	Signboard: PAF1, WL3, DSL0, PL0, TDB5, TDT0, P2, E1 and SP1. Gallows: PAF1, WL3, DSL0, PL0, TDB2, TDT4 and SP1.

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

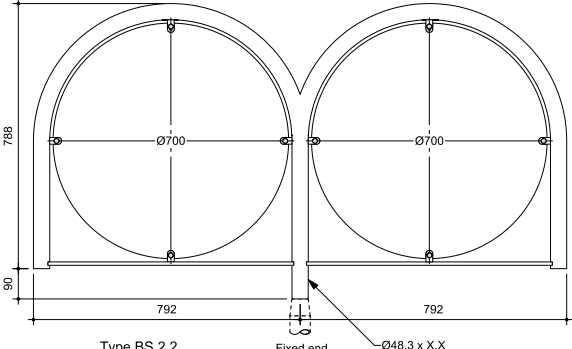
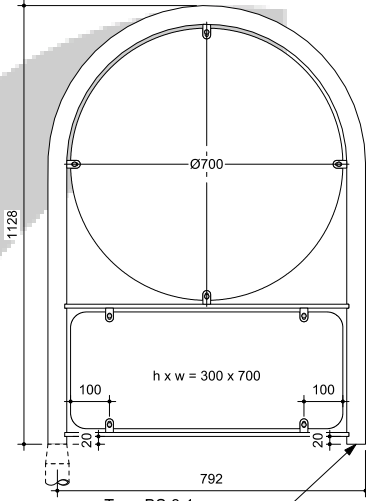
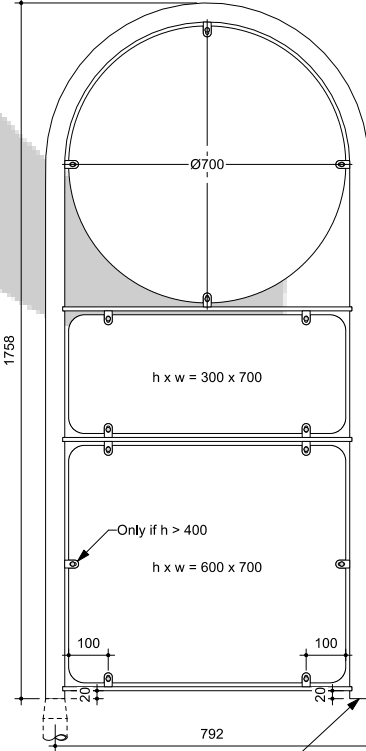
DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
 Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

Certificate No.: 2531-CPR-CSC10015

Issue date: 2018-11-21

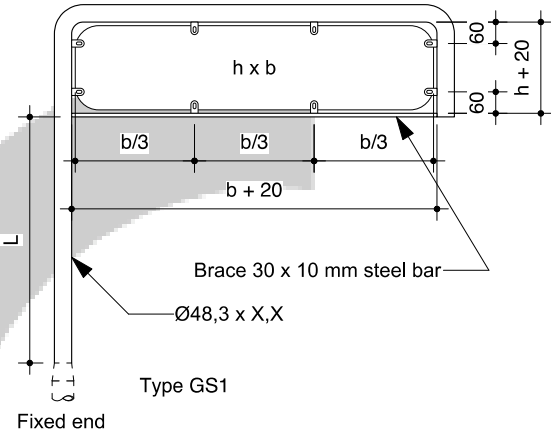
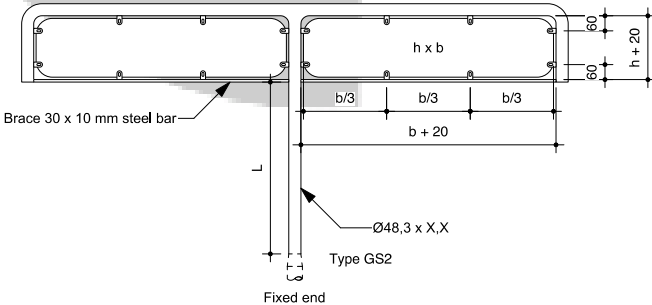
 Type BS 2.2		Signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB1, TDT3 and SP1.	Signboard: PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1. Gallows: PAF1, WL3, DSL0, PL0, TDB2, TDT4 and SP1.	
 Type BS 3.1	Circular signboard: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 300 x 700 mm signboard: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL1, DSL0, PL0, TDB1, TDT4 and SP1.	Circular signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 300 x 700 mm signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB2, TDT4 and SP1.	Circular signboard: PAF1, WL3, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 300 x 700 mm signboard: PAF1, WL3, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL3, DSL0, PL0, TDB2, TDT5 and SP1.	
 Type BS 3.2	Circular signboard: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 300 x 700 mm signboard: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 600 x 700 mm signboard: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. Gallows: PAF1, WL1, DSL0, PL0, TDB3, TDT5 and SP1.	Signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 300 x 700 mm signboard: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1. 600 x 700 mm signboard: PAF1, WL2, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1. Gallows: PAF1, WL2, DSL0, PL0, TDB3, TDT6 and SP1.	-	

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

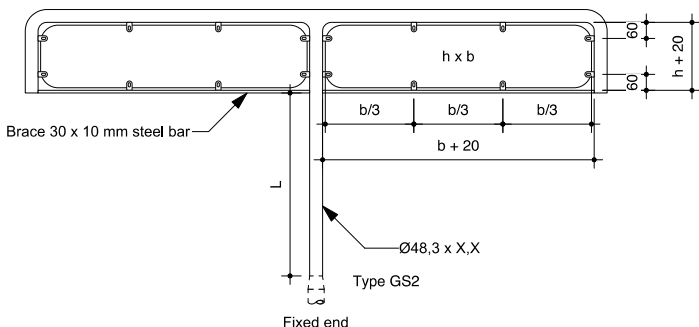
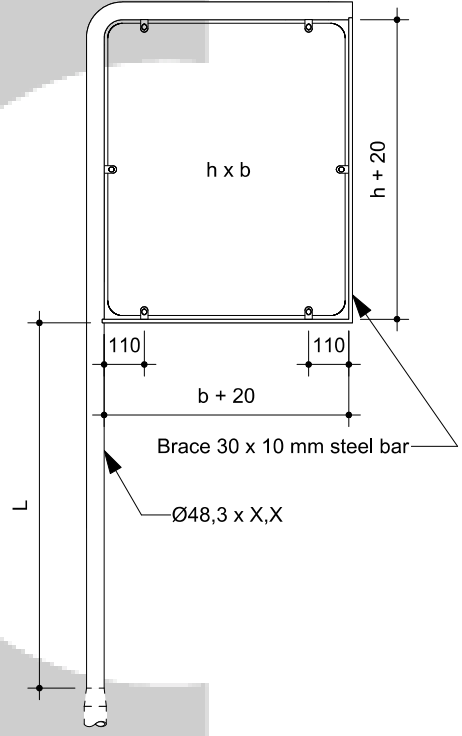
E-mail: info@dbicertification.dk
www.dbicertification.dk

Sign, sizes and mounting system Pipes: Minimum steel quality: S235 in dimension $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$, $\varnothing 48,3 \times 3,2$, $\varnothing 60,3 \times 3,6$ and $\varnothing 60,3 \times 4,5$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness		Classification according to wind load classes		
		Placed in WL1	Placed in WL2	Placed in WL3
 Upper part, single sign		$h \leq 235$ mm and $b \leq 1500$ mm $L \leq 1200$ mm		
		PAF1, WL1, DSL0, PL0, TDB2, TDT4, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, TDT5, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB3, TDT5, P2, E1 and SP1.
		$h \leq 235$ mm and $b \leq 1750$ mm $L \leq 1200$ mm		
		PAF1, WL1, DSL0, PL0, TDB2, TDT5, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, TDT5, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB3, TDT5, P2, E1 and SP1.
 Upper part, double sign		$h \leq 235$ mm and $b \leq 1500$ mm $L \leq 800$ mm		
		PAF1, WL1, DSL0, PL0, TDB2, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB2, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB3, P2, E1 and SP1.
		$h \leq 235$ mm and $b \leq 1750$ mm $L \leq 800$ mm		
		PAF1, WL1, DSL0, PL0, TDB2, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB3, P2, E1 and SP1.

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Certificate No.: 2531-CPR-CSC10015

Issue date: 2018-11-21

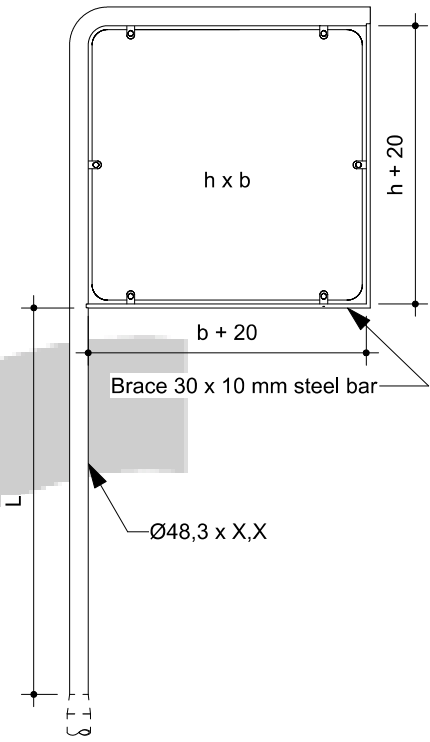
 Upper part, double sign	$h \leq 235 \text{ mm}$ and $b \leq 2000 \text{ mm}$ $L \leq 800 \text{ mm}$		
 Upper part	$h \leq 800 \text{ mm}$ and $b \leq 650 \text{ mm}$ $L \leq 1000 \text{ mm}$		

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
 Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

		h ≤ 700 mm and b ≤ 700 mm L ≤ 1000 mm		
 Upper part		PAF1, WL1, DSL0, PL0, TDB3, TDT1, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, TDT2, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB4, TDT3, P2, E1 and SP1.

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

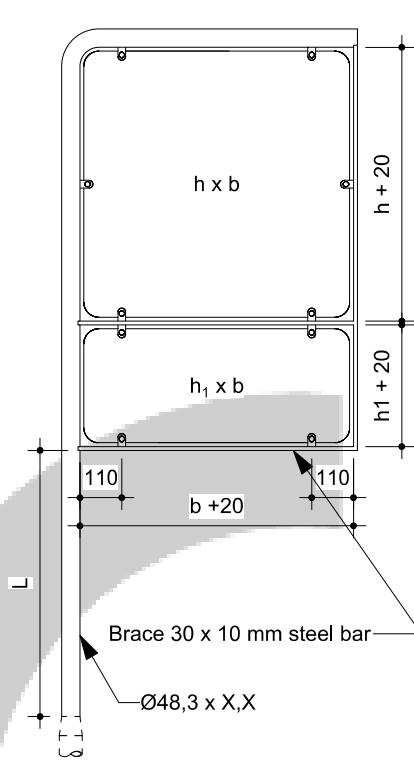
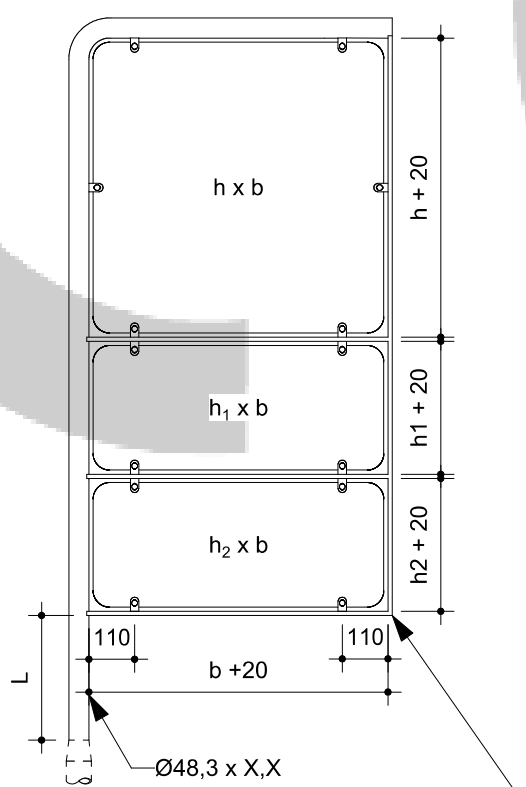
Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk



Prod. Reg. Nr. 7023

Version 2016-01-07
Page **6** of **16**

 Upper part	$h \leq 700 \text{ mm}, h_1 \leq 300 \text{ mm}$ $\text{and } b \leq 700 \text{ mm}$ $L \leq 700 \text{ mm}$		
	PAF1, WL1, DSL0, PL0, TDB3, TDT2, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, TDT2, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB4, TDT3, P2, E1 and SP1.
 Upper part	$h \leq 700 \text{ mm}, h_1 \leq 300 \text{ mm}$ $h_2 \leq 300 \text{ mm and } b \leq 700 \text{ mm}$ $L \leq 300 \text{ mm}$		
	PAF1, WL1, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
 Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk


 Prod. Reg. Nr. 7023

Version 2016-01-07
 Page 7 of 16

Certificate No.: 2531-CPR-CSC10015

Issue date: 2018-11-21



	Upper part	<table border="1"> <thead> <tr> <th colspan="3">h ≤ 600 mm, b ≤ 1000 mm and L ≤ 875 mm</th> </tr> </thead> <tbody> <tr> <td>PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.</td> <td>PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.</td> <td>PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.</td> </tr> </tbody> </table>	h ≤ 600 mm, b ≤ 1000 mm and L ≤ 875 mm			PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.
h ≤ 600 mm, b ≤ 1000 mm and L ≤ 875 mm								
PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.						
	Upper part	<table border="1"> <thead> <tr> <th colspan="3">h ≤ 600 mm, b ≤ 1750 mm and L ≤ 375 mm</th> </tr> </thead> <tbody> <tr> <td>PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.</td> <td>PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.</td> <td>PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.</td> </tr> </tbody> </table>	h ≤ 600 mm, b ≤ 1750 mm and L ≤ 375 mm			PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.
h ≤ 600 mm, b ≤ 1750 mm and L ≤ 375 mm								
PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB1, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E1 and SP1.						

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk



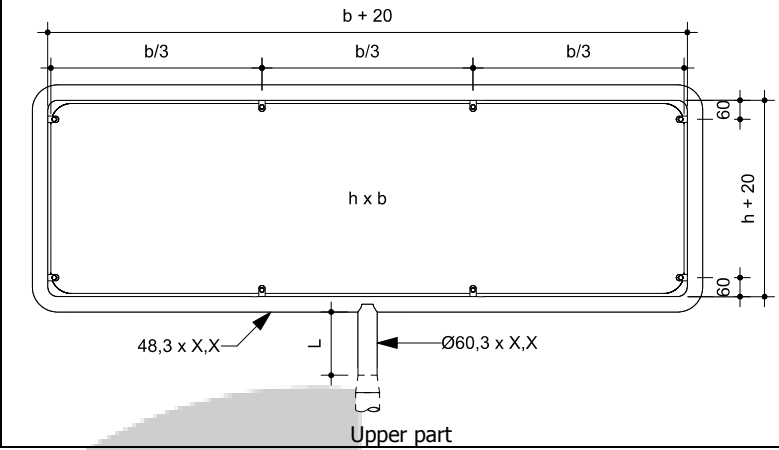
Prod. Reg. Nr. 7023

Version 2016-01-07
Page 8 of 16

Certificate No.: 2531-CPR-CSC10015

Issue date: 2018-11-21



		$h \leq 600 \text{ mm}$, $b \leq 2000 \text{ mm}$ and $L \leq 175 \text{ mm}$		
		PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1.	PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E1 and SP1.	PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E1 and SP1.
Resistance to horizontal loads		NPD To be declared on the support		
Resistance to bending		NPD To be declared on the support		
Resistance to torsion		NPD To be declared on the support		
Fixings:		Pass. The signs, sizes and galls are intended for mounting at the top of another straight steel pipe. Together the galls and the straight steel is the support for the sign. M6 screws, nuts and washers are minimum A2, class 70 ($f_{y,b} = 450 \text{ MPa}$). Pressure force for tightening: 2 kN.		
Temporary deflection (supports) -bending -torsion		NPD To be declared on the support		
Permanent deflection		NPD		
Performance under vehicle impact		NPD To be declared on the support		

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

 **DANAK**
Prod. Reg. Nr. 7023

Version 2016-01-07
Page 9 of 16

ORALITE® 5710 Engineering Grade:					
Retroreflective sheeting ORALITE® 5710 Engineering Grade with the following original dyed colours:					
Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3. For black colours: 7.2.2.1.3	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5. For black colours: 7.2.2.1.4
White	ORALITE® 5710-010 Engineering Grade	CR2	RA1	pass	pass
Yellow	ORALITE® 5710-020 Engineering Grade	CR2	RA1	pass	pass
Red	ORALITE® 5710-030 Engineering Grade	CR2	RA1	pass	pass
Blue	ORALITE® 5710-050 Engineering Grade	CR2	RA1	pass	pass
Green	ORALITE® 5710-060 Engineering Grade	CR2	RA1	pass	pass
Orange	ORALITE® 5710-035 Engineering Grade	CR1	RA1	pass	pass
Brown	ORALITE® 5710-080 Engineering Grade	CR2	RA1	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following Lettering Film:					
Black	ORALITE® 5071-070 Lettering Film	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following screen printing colours on white retroreflective sheeting:					
Yellow	ORALITE® 5018-020 Screen Printing ink	CR2	RA1	pass	pass
Red	ORALITE® 5018-030 Screen Printing ink	CR2	RA1	pass	pass
blue	ORALITE® 5018-050 Screen Printing ink	CR2	RA1	pass	pass
Green	ORALITE® 5018-060 Screen Printing ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing ink	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following screen printing colours on yellow retroreflective sheeting:					
Red	ORALITE® 5018-030 Screen Printing ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing ink	NR1	-	pass	pass
Digital printing colours:					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate ORALITE® 5062-000 Transparent Film.					
Digital Printing Colour ORALITE® 5019 UV Digital Printing Ink					
On white sheeting	ORALITE® 5710-010 Engineering Grade and				
White	ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Grey	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

Certificate No.: 2531–CPR–CSC10015

Issue date: 2018-11-21



Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	NR1	-	pass	pass
If the colour black is printed solely, this material combination is admitted to be used without the transparent laminate.					
Black	ORALITE® 5019-070 UV Digital Printing Ink	NR1	-	pass	pass
Digital printing colour ORALITE® 5019i UV Digital Printing Ink					
On white sheeting	ORALITE® 5710-010 Engineering Grade and				
White	ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE® 5019i-020 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE® 5019i-030 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE® 5019i-050 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE® 5019i-060 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Orange	ORALITE® 5019i-035 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR1	RA1	pass	pass
Brown	ORALITE® 5019i-080 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Black	ORALITE® 5019i-070 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	NR1	-	pass	pass
Clear protective overlay film: Clear protective overlay films (Anti-Graffiti) are always admitted in combination with retroreflective sheeting and a colouring process.					
Anti-Graffiti: The original dyed retroreflective sheeting with the screen-printing ORALITE® 5018 is accepted to be laminated with the clear protective overlay film ORALITE® 5095 Anti-Graffiti Film for the following colours:					
Original dyed retroreflective sheeting ORALITE® 5710 Engineering Grade with screen-printing ORALITE® 5018					
Red	ORALITE® 5018-030 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Blue	ORALITE® 5018-050 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

 **DANAK**
Prod. Reg. Nr. 7023

Version 2016-01-07
Page **11** of **16**

Certificate No.: 2531–CPR–CSC10015

Issue date: 2018-11-21



ORALITE® 5810 High Intensity Grade:					
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following original dyed colours:					
Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3. For black colours: 7.2.2.1.3	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5. For black colours: 7.2.2.1.4
White	ORALITE® 5810-010 High Intensity Grade	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade	CR2	RA2	pass	pass
Green	ORALITE® 5810-060 High Intensity Grade	CR2	RA2	pass	pass
Brown	ORALITE® 5810-080 High Intensity Grade	CR2	RA2	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Lettering Film:					
Black	ORALITE® 5081-070 Lettering Film	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Coloured Laminates:					
Yellow	ORALITE® 5061-020 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5061-060 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5061-080 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5061-625 Transparent Film	CR1	RA2	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Screen Printing Colours on white retroreflective sheeting:					
Yellow	ORALITE® 5018-020 Screen Printing Ink	CR2	RA2	pass	pass
Red	ORALITE® 5018-030 Screen Printing Ink	CR2	RA2	pass	pass
Blue	ORALITE® 5018-050 Screen Printing Ink	CR2	RA2	pass	pass
Green	ORALITE® 5018-060 Screen Printing Ink	CR2	RA2	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Screen Printing Colours on yellow retroreflective sheeting:					
Red	ORALITE® 5018-030 Screen Printing Ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink	NR1	-	pass	pass
Digital Printing Colours:					
Digital Printing Colour ORALITE® 5019 UV Digital Printing Ink					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with a transparent laminate.					
Digital Printing with protective laminate ORALITE® 5061-000 Transparent Film					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
WWhite	ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and	CR2	RA2	pass	pass

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

 **DANAK**
Prod. Reg. Nr. 7023

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

Version 2016-01-07
Page 12 of 16

Certificate No.: 2531–CPR–CSC10015

Issue date: 2018-11-21



	ORALITE® 5061-000 Transparent Film				
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2*	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	NR1	-	pass	pass
Digital Printing with protective laminate ORALITE® 5090 Anti-Dew Film:					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	NR1	-	pass	pass
Digital Printing with protective laminate ORALITE® 5095 Anti-Graffiti Film:					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
If the colour Black is printed solely, this material combination is admitted to be used without the transparent laminate					
Black	ORALITE® 5019-070 UV Digital Printing Ink	NR1	-	pass	pass

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

 **DANAK**
Prod. Reg. Nr. 7023

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

Version 2016-01-07
Page **13** of **16**

Digital Printing Colour ORALITE® 5019i UV Digital Printing Ink:

The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate

ORALITE® 5061-000 Transparent Film

On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019i-020 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5019i-030 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019i-050 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5019i-060 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5019i-080 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019i-625 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019i-073 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Black	ORALITE® 5019i-070 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	NR1	-	pass	pass

Clear overlay film with special function:

Clear overlay films with special function (anti-dew and anti-graffiti) are always admitted in combination with a dyed sheeting and a colouring process.

Anti Dew:

The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film anti-dew function ORALITE® 5090 Anti-Dew film for the following colours:

Dyed Retroreflective Sheeting:

White	ORALITE® 5810-010 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass

Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Coloured Laminate:

Yellow	ORALITE® 5061-020 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass

Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Lettering film:

Black	ORALITE® 5081-070 Lettering Film and ORALITE® 5090 Anti-Dew film	NR1	-	pass	pass
-------	--	-----	---	------	------

Anti-Graffiti:

The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film with anti-graffiti function ORALITE® 5095 Anti Graffiti Film for the following colours.

Dyed Retroreflective Sheeting:

White	ORALITE® 5810-010 High Intensity Grade	CR2	RA2	pass	pass
-------	--	-----	-----	------	------

The certificate shall be reproduced in extenso

– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk


Prod. Reg. Nr. 7023

Version 2016-01-07
Page 14 of 16

Certificate No.: 2531–CPR–CSC10015

Issue date: 2018-11-21



	and ORALITE® 5095 Anti-Graffiti Film				
Yellow	ORALITE® 5810-020 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Coloured Laminate:					
Yellow	ORALITE® 5061-020 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Lettering Film:					
Black	ORALITE® 5081-070 Lettering Film and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
External illumination:					
mean illuminance,			NPD		
uniformity of illuminance			NPD		
Corrosion resistance					
Steel pipes and fins			Minimum s235 SP1 The pipe and fins are after manufacturing hot dip galvanized to a minimum of 60µm		
Screws, nuts and washers			SP2 Minimum A2, Class 70		
Aluminum plate			SP1 Lacquered Al-plate on exposed side if any		
Resistance to penetration of dust and water			NPD The product can not be provided with compartments for electrical equipment		

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

 **DANAK**
Prod. Reg. Nr. 7023

Version 2016-01-07
Page **15** of **16**

Certificate No.: 2531–CPR–CSC10015

Issue date: 2018-11-21



Annex 2

TECHNICAL BASIS

Title	Date
Infra Goup Danmark ApS Calculation of minor traffic signs (ITC) Type BS, upper part Ø48,3 x 2,9, Ø48,3 x 3,0, and Ø48,3 x 3.2 mm steel pipes.	September 2016
Infra Group danmark ApS Calculation of minor traffic signs (ITC) Shapes and sizes for signs mounted in gallows type GS Revision 01	January 2018
Retroreflective Sheetings 5710 Engineering grade: 0913-CPD-2009/001 Annex	2009-03-17 2018-02-28
Retroreflective Sheeting Oralite 5810 High Intensity grade: 0913-CPD-2009/035 Annex	2012-06-27 2018-02-28

The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

DBI Certification A/S

Jernholmen 12, 2650 Hvidovre
Tlf.: 36 34 90 90

E-mail: info@dbicertification.dk
www.dbicertification.dk

 **DANAK**
Prod. Reg. Nr. 7023

Version 2016-01-07
Page **16** of **16**